


# GHANA

## COUNTRY REPORT



### GIS Hydropower Resource Mapping and Climate Change Scenarios for the ECOWAS Region





## Imprint



**Title:** GIS Hydropower Resource Mapping and Climate Change Scenarios for the ECOWAS Region, Country Report for Ghana

**Publisher:** ECOWAS Centre for Renewable Energy and Energy Efficiency (ECREEE), Praia, Cabo Verde. *All results and maps are published on the ECOWAS Observatory for Renewable Energy and Energy Efficiency - [www.ecowrex.org/smallhydro](http://www.ecowrex.org/smallhydro)*

**Contact:** [info@ecreee.org](mailto:info@ecreee.org)

March 2017

### Program Responsibility:

The ECOWAS Small-Scale Hydropower Program was approved by ECOWAS Energy Ministers in 2012. In the frame of this program ECREEE assigned Pöyry Energy GmbH in 2015 for implementation of a GIS Hydro Resource Mapping and Climate Change Scenarios in ECOWAS countries with Hydropower potentials. One deliverable of this project are 14 country reports summarizing the GIS Hydro Resource mapping and climate change scenarios. The overall methodology background information and lessons learnt of these Country Reports are described in the final report *“GIS Hydropower Resource Mapping and Climate Change Scenarios for the ECOWAS Region - Methodology & Lessons Learnt.”*

[www.ecowrex.org/smallhydro](http://www.ecowrex.org/smallhydro)

### Project Team:



#### Pöyry Energy GmbH, Vienna, Austria

Mr. Harald Kling (project management, team leader hydrology)

Mr. Martin Fuchs (team leader hydropower)

Mr. Philipp Stanzel (team leader climate change)

Ms. Maria Paulin

Mr. Bernhard Wipplinger

Mr. Stefan Wimmer

Ms. Elisabeth Freiberger

Mr. Christoph Libisch

Mr. Raimund Mollner

Mr. Rudolf Faber

Mr. Herbert Weilguni



#### ECOWAS Centre for Renewable Energy and Energy Efficiency, Praia, Cabo Verde

Mr. Mahama Kappiah, Executive Director

Mr. Hannes Bauer, Project Management, Lead hydropower Program

Mr. Daniel Paco, GIS Expert

#### The ECOWAS Small-Scale Hydropower Program is managed by:

ECOWAS Centre for Renewable Energy and Energy Efficiency (ECREEE)

Mr. Hannes Bauer, ECREEE

Contact: [info@ecreee.org](mailto:info@ecreee.org)

### Project Funding



Austrian Development Cooperation – ADC

Spanish Ministry of External Affairs and Cooperation - AECID

## PREFACE

The 15 countries of the Economic Community of West African States (ECOWAS) face a constant shortage of energy supply, which has negative impacts on social and economic development, including also strongly the quality of life of the population. In mid 2016 the region has about 50 operational hydropower plants and about 40 sites are under construction or refurbishment. The potential for hydropower development – especially for small-scale plants – is assumed to be large, but exact data were missing in the past.


The ECOWAS Centre for Renewable Energy and Energy Efficiency (ECREEE), founded in 2010 by ECOWAS, ADA, AECID and UNIDO, responded to these challenges and developed the ECOWAS Small-Scale Hydropower Program, which was approved by ECOWAS Energy Ministers in 2012. In the frame of this program ECREEE assigned Pöyry Energy GmbH in 2015 for implementation of a hydropower resource mapping by use of Geographic Information Systems (GIS) for 14 ECOWAS member countries (excluding Cabo Verde). The main deliverable of the project is a complete and comprehensive assessment of the hydro resources and computation of hydropower potentials as well as possible climate change impacts for West Africa. Main deliverables of the GIS mapping include:

- River network layer: GIS line layer showing the river network for about 500,000 river reaches (see river network map below) with attributes including river name (if available), theoretical hydropower potential, elevation at start and end of reach, mean annual discharge, mean monthly discharge, etc.
- Sub-catchment layer: GIS polygon layer showing about 1000 sub-catchments with a size of roughly 3000 km<sup>2</sup>. This layer summarizes the data of all river reaches located within the sub-catchment.

Hydropower plants are investments with a lifetime of several decades. Therefore, possible impacts of climate change on future discharge were incorporated into the river network and sub-catchment GIS layers. The GIS layers are available in the ECREEE Observatory for Renewable Energy and Energy Efficiency ([www.ecowrex.org](http://www.ecowrex.org)).

This report summarizes the results of the GIS layers for Ghana and includes:

- General information
- Climate
- Hydrology
- Hydropower potential
- Climate change

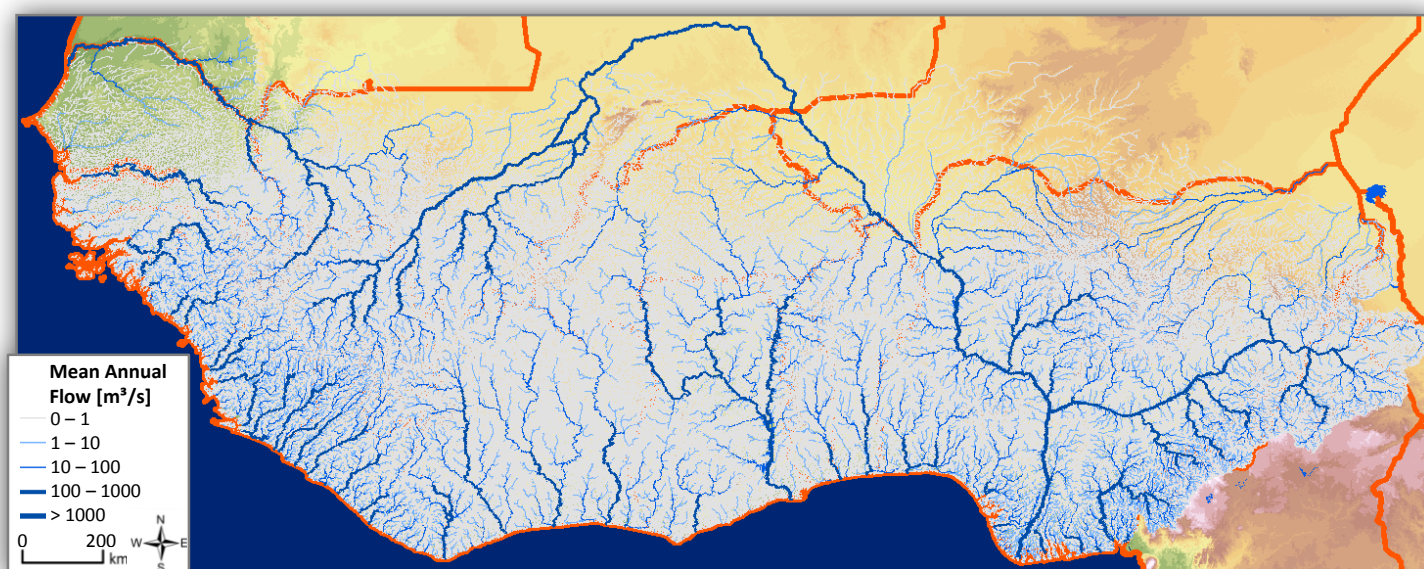

## GENERAL INFORMATION

Ghana is a medium-sized country in West Africa with about 26.8 Mio inhabitants. The capital of Ghana is the coastal city of Accra in the south of the country. The neighboring countries are Côte d'Ivoire in the west, Burkina Faso in the north, and Togo in the east (see map below).

Hydropower plays an important role for energy generation in Ghana. Currently there are three large hydropower plants existing, most notably Akosombo HPP with Lake Volta. There are no small or medium sized hydropower plants existing in Ghana (see table below).






General Information for Ghana	
Inhabitants (2014)	26.8 Mio.
Area (2014)	238,540 km <sup>2</sup>
GDP per capita (2014)	1,440 USD
Electrification rate total/urban/rural (2012/2011)	52/70/32 %
Hydro installed capacity (2013)	1,580 MW
Electricity generation (2013)	12,911 GWh
Electricity generation from hydropower (2013)	4,635 GWh
Number of existing hydropower plants with installed capacity > 1 MW (2016)	3
Number of existing small hydropower plants with installed capacity 1-30 MW (2016)	0
Number of existing medium hydropower plants with installed capacity 30-100 MW (2016)	0
Number of existing large hydropower plants with installed capacity >100 MW (2016)	3

Source: ECOWAS Country Profiles ([www.ecowrex.org](http://www.ecowrex.org))  
Reference year given in brackets.

# CLIMATE

The climate in West Africa can be grouped into six zones with distinctive seasonal rainfall patterns (L’Hôte et al., 1996). In Ghana the climate ranges from “Transitional equatorial” in the south to “Transitional tropical” in the north. The southern regions have two rainfall peaks in June and September, whereas in the north rainfall peaks in August. These differences are caused by the seasonal shifting of the Inter Tropical Convergence Zone (ITCZ) from south to north and back to the south. The diagrams below summarize the mean monthly rainfall and air temperature in these climate zones.

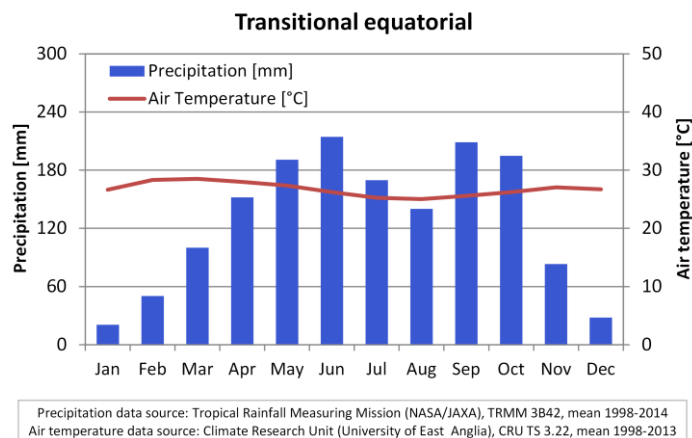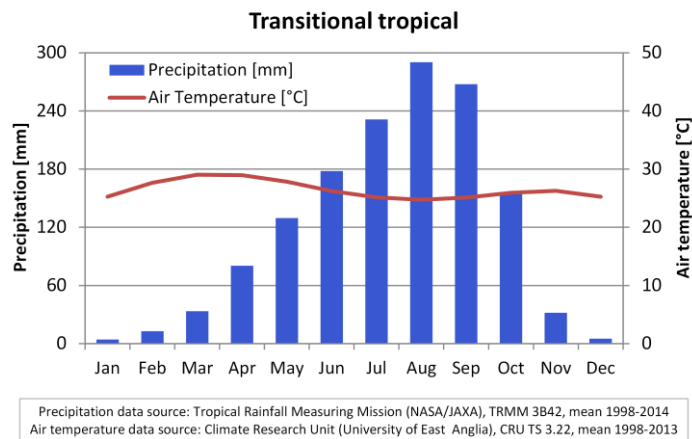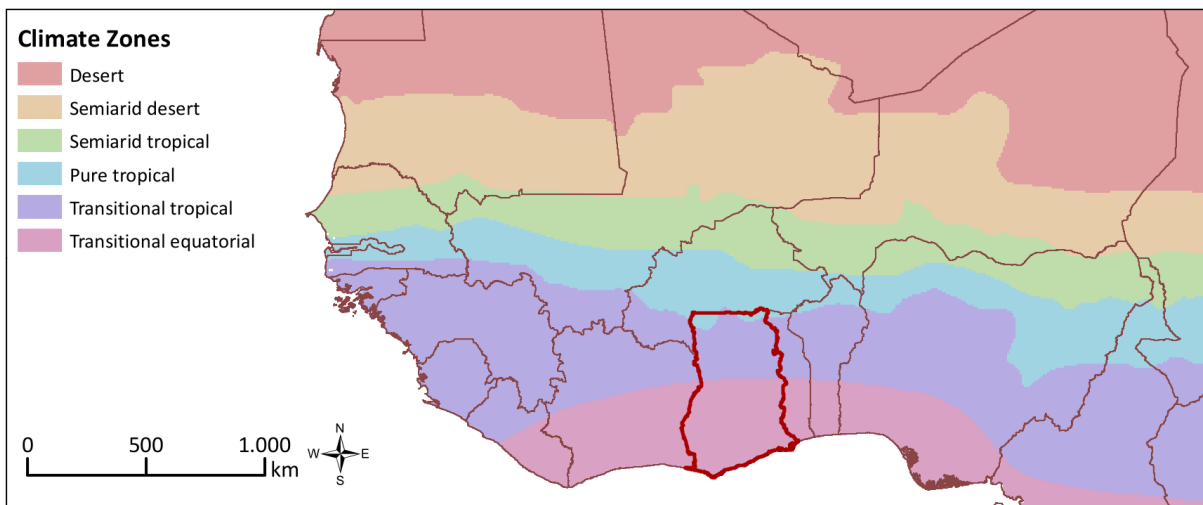


## HYDROLOGY

The Volta River is the largest river in Ghana. About 70 % of the country is located in the Volta basin, which discharges to the south into the Gulf of Guinea. The Black Volta and White Volta are the major tributaries from Burkina Faso in the north. The Oti River enters Ghana from Togo in the north-east. In the south of the country the Pra and Tano rivers are notable basins, both covering about 10 % of the country.



The figures on the following page illustrate the annual and seasonal variations in discharge for the Black Volta, Pra and Oti rivers.

All three rivers show strong variations in annual discharge over the last 60 years. Flow was high in the 1950s and 1960s, whereas the 1980s were rather dry. The period 1998-2014 represents moderately wet conditions in the historic context.

There is strong seasonality in discharge. The Pra River has two seasonal peaks in July and October, whereas peak flow of the Black Volta and Oti rivers occurs in September.

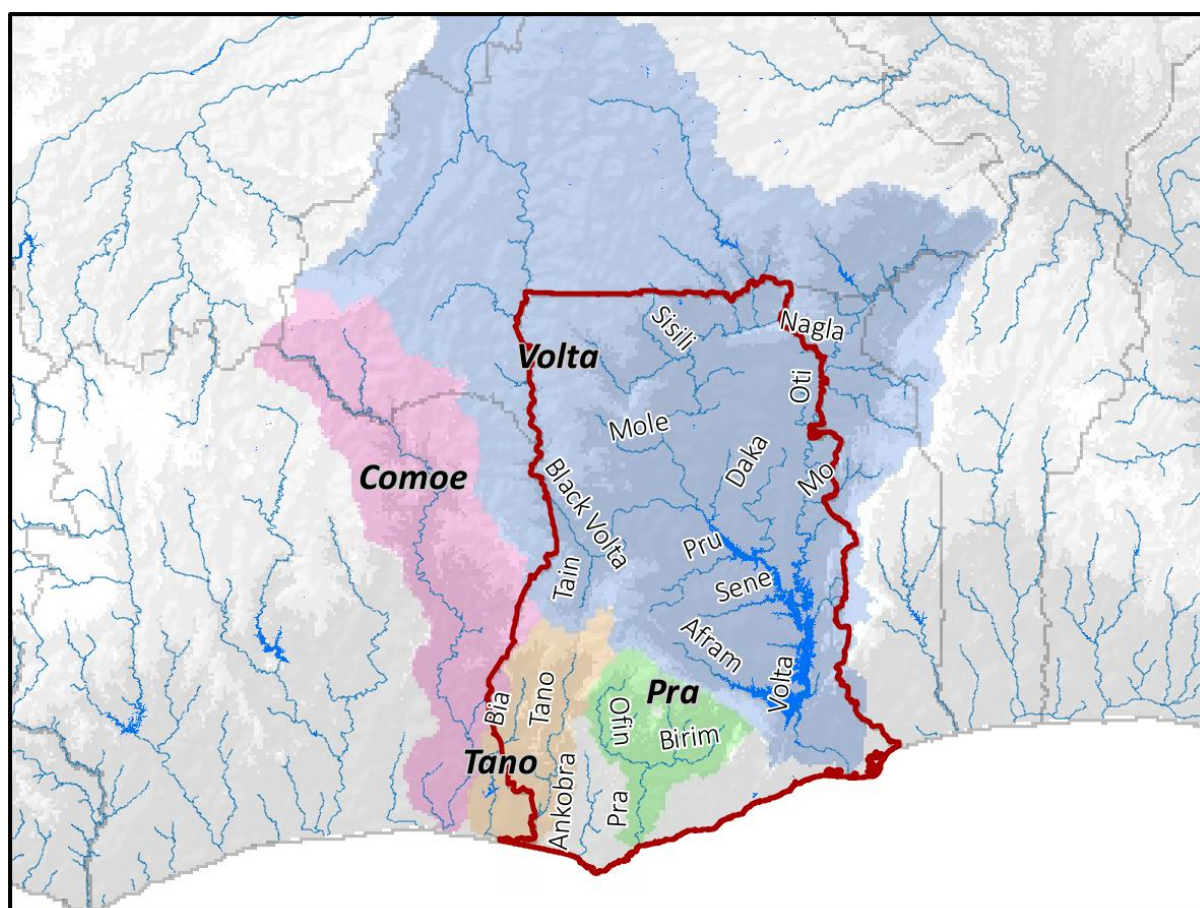


### Basins

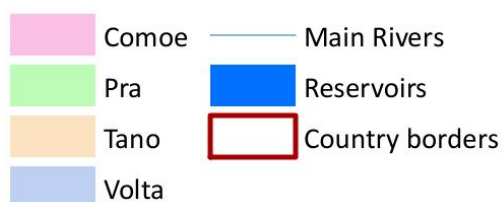


### Percentage of country's area located in the four largest river basins

Comoe basin	1.1 %
Pra basin	9.7 %
Tano basin	9.0 %
Volta basin	70.0 %

## Historic Variation in Annual Discharge

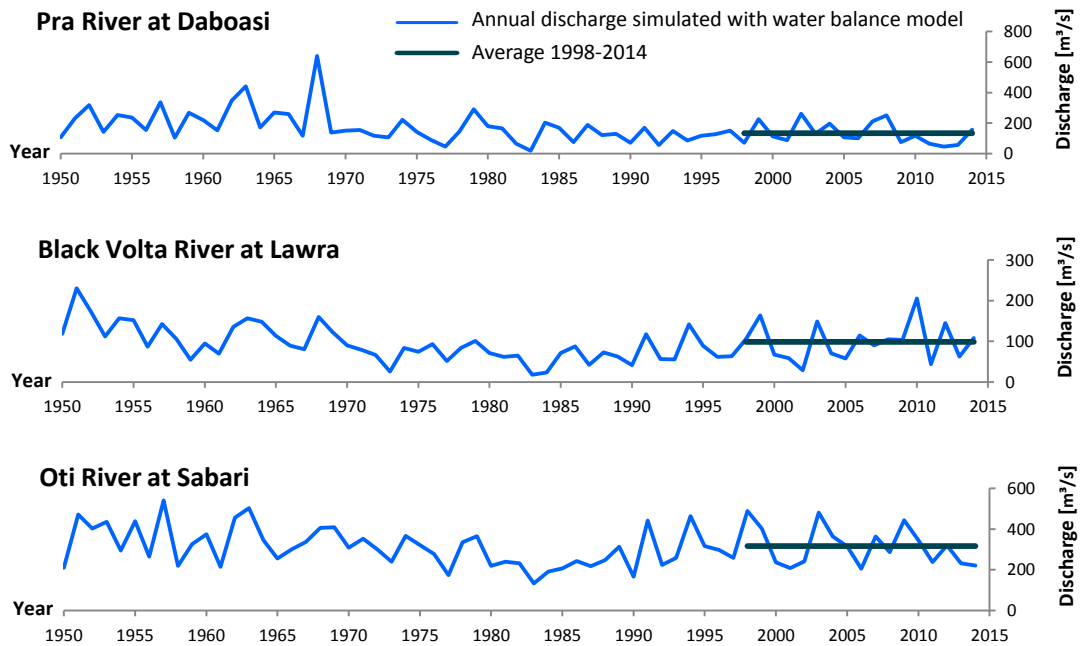

## Seasonality in Discharge

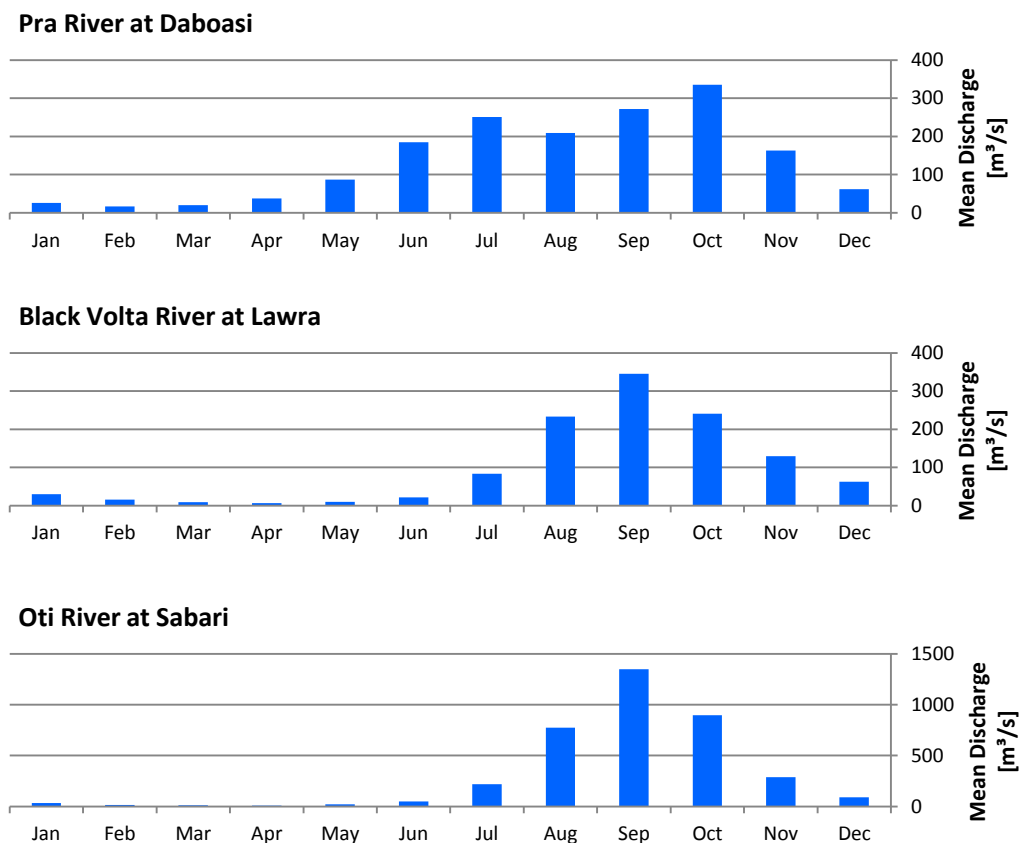




## Annual Water Balance

The long-term mean annual water balance describes the partitioning of precipitation (rainfall) into actual evapotranspiration (transpiration by plants, evaporation from soil) and runoff, as over long time periods the change in storage (soil moisture, ground water) can be assumed to be negligible for the mean annual water balance.

The regional distribution of the water balance components in West Africa is strongly controlled by spatial variations in mean annual precipitation. An annual water balance model calibrated with observed discharge data of 400 gauges was used to determine mean annual actual evapotranspiration and runoff for the period 1998-2014, as shown in the maps below. In most parts of West Africa mean annual actual evapotranspiration is considerably larger than mean annual runoff.

This is also the case for the mean annual water balance in Ghana. In the central parts of the country about 85 % of rainfall is lost via evapotranspiration and only about 15 % of rainfall generates runoff. This is even more extreme in the northern parts of the country, where about 90 % of rainfall is lost via evapotranspiration and only about 10 % of rainfall generates runoff.

Mean annual discharge is computed by aggregating runoff along the river network, which together with channel slope determines the hydropower potential (see next section).

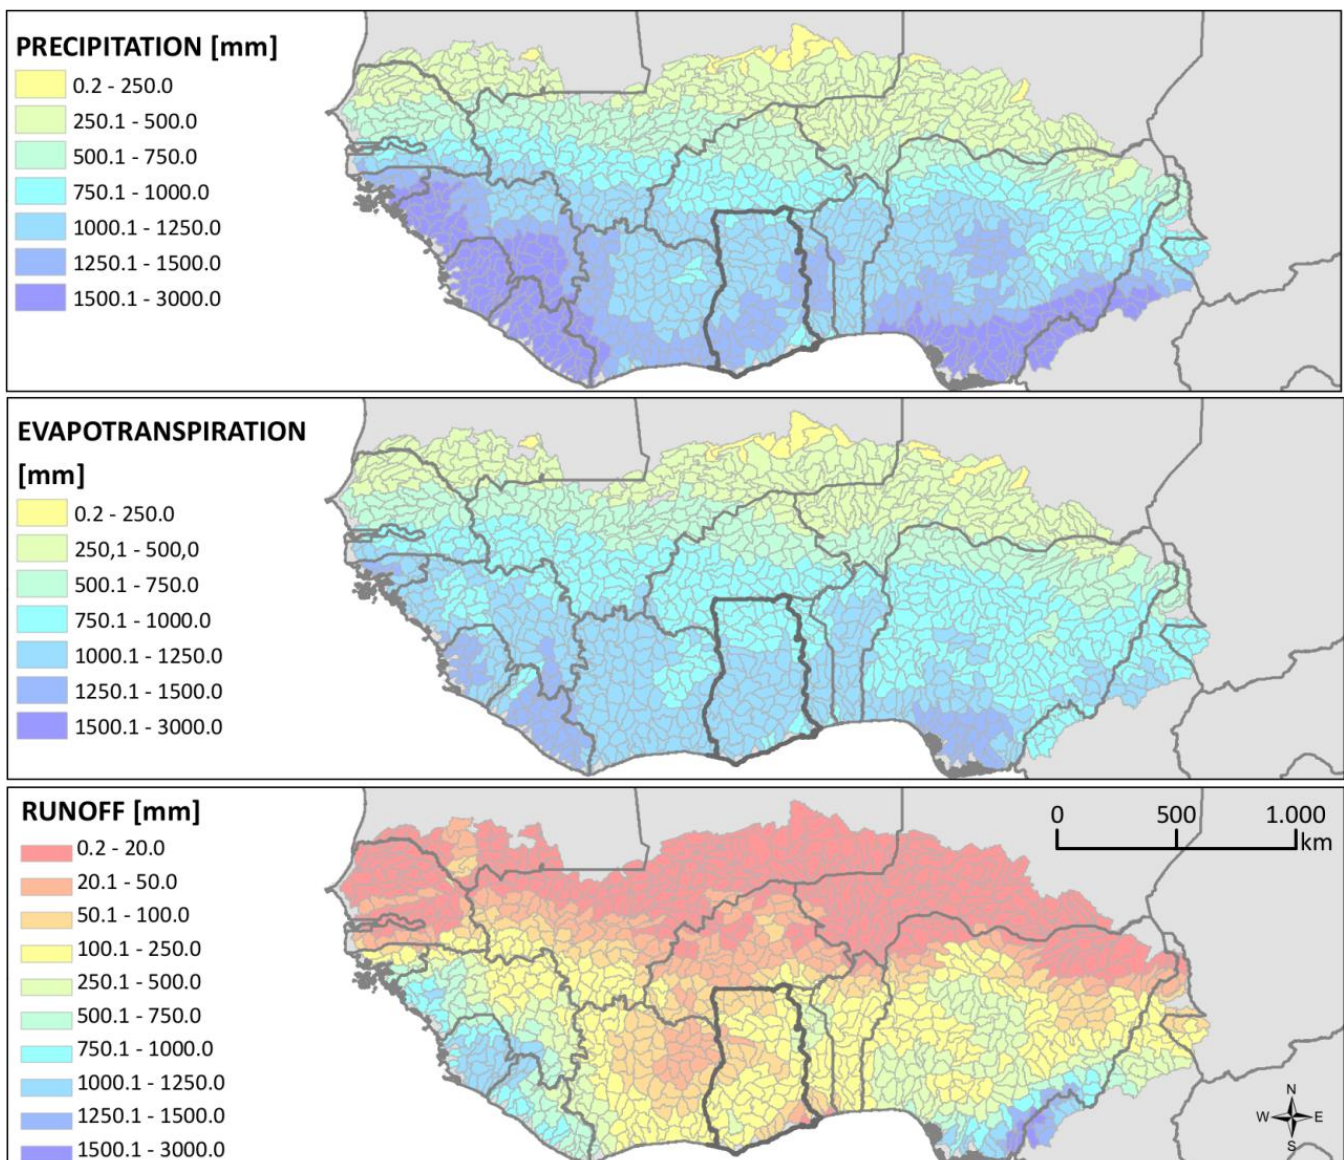


## HYDROPOWER POTENTIAL

The theoretical hydropower potential of a river is defined as the amount of power that would be produced if the full head of the river was used and if 100 % of the mean annual discharge was turbinated (i.e. no spillway losses or environmental flow constraints). In this study overall plant efficiency (turbines, hydraulic losses) is assumed with 87 %.

The theoretical hydropower potential for Ghana is estimated to be 2043 MW (reference period 1998-2014), which is the total of all rivers in the country.

The following table and figure show how the total potential of the country is subdivided into theoretical potential for hydropower plants (HPP) of different plant size. A classification scheme based on mean annual discharge (m<sup>3</sup>/s) and specific hydropower potential (MW/km) was applied to determine the preferred plant size for river reaches with a typical length of 1-10 km. Four classes were considered for the preferred plant size, including pico/micro/mini HPP (< 1 MW installed capacity), small HPP (1-30 MW installed capacity), medium/large HPP (> 30 MW installed capacity), and “No attractive potential” for river reaches with too low specific hydropower potential. For the latter in some cases it may still be worthwhile to utilize this potential in e.g. multi-purpose schemes. The technical potential was not assessed in this study.





**Theoretical Hydropower Potential  
Ghana: 2043 MW**

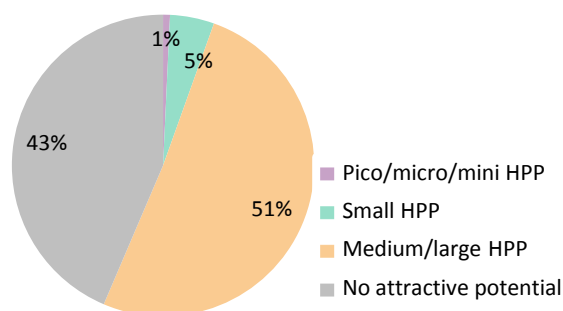

Theoretical Hydropower Potential of Rivers in Ghana	
Pico/micro/mini HPP	15 MW
Small HPP	97 MW
Medium/large HPP	1041 MW
No attractive potential	890 MW
Total of all rivers in country	2043 MW
Total of rivers with attractive theoretical potential for pico/micro/mini, small, or medium/large HPP	1153 MW

## Longitudinal Profiles of Selected Rivers


The following graphs show longitudinal profiles of the Pra, Black Volta and Oti rivers, plotting elevation (red) and mean annual discharge (blue) from the source to the mouth of the river. Inflow from tributaries is clearly identifiable as sudden increase in river discharge. The background color indicates if a river reach has an attractive theoretical hydropower potential for pico/micro/mini HPP (< 1 MW installed capacity), small HPP (1-30 MW installed capacity), or medium/large HPP (> 30 MW installed capacity).

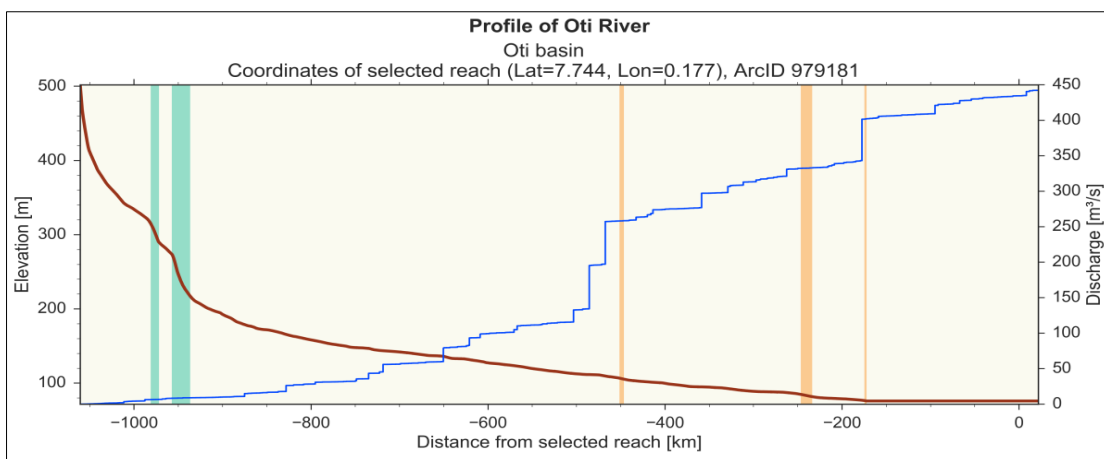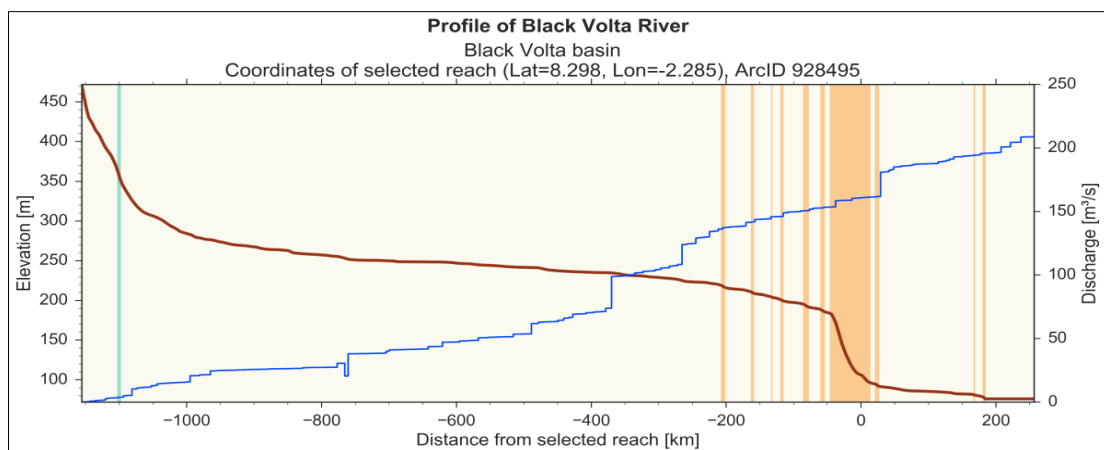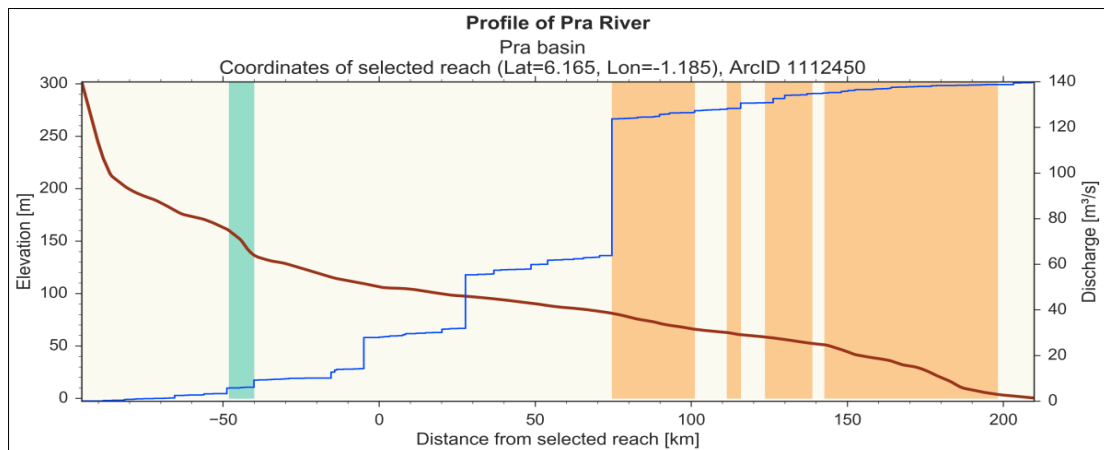

## Hydropower Potential in Selected Sub-catchments

The following maps and tables give information about the theoretical hydropower potential of selected sub-catchments in Ghana. Sub-catchments with attractive theoretical hydropower potential for small hydropower plants are mainly found along the border with Togo.

The table data summarizes the total theoretical hydropower potential of all river reaches within the sub-catchment. River reaches were grouped according to preferred plant size for pico/micro/mini HPP (< 1 MW installed capacity), small HPP (1-30 MW installed capacity), or medium/large HPP (> 30 MW installed capacity). Similarly, the color code of the river network displayed in the maps indicates the preferred plant size. A grey color indicates no attractive potential for hydropower development.

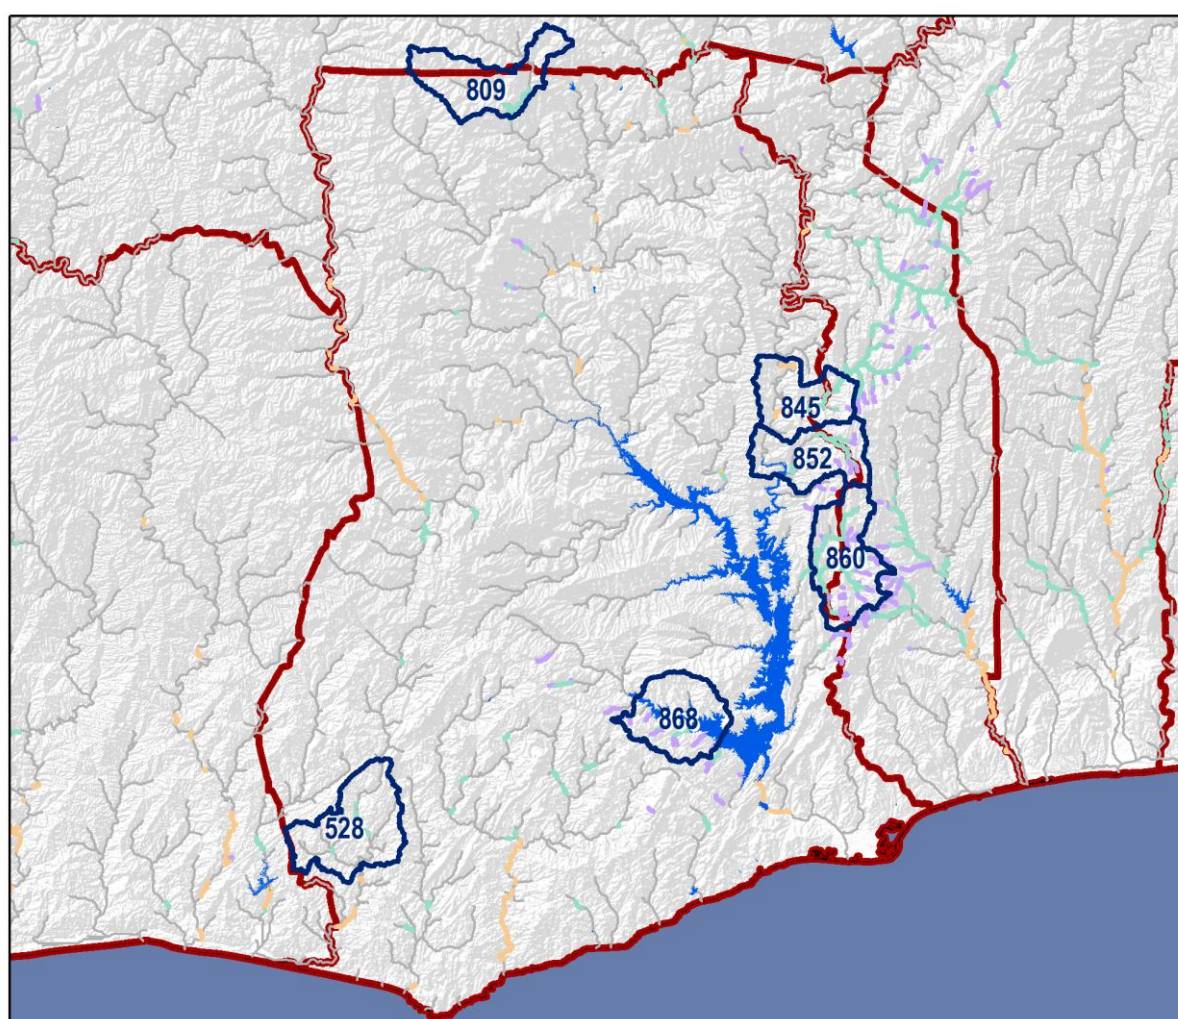


### River network showing preferred hydropower plant size

- Pico/micro/mini HPP
- Small HPP
- Medium/large HPP

### Map overlays


- Selected sub-catchments with ID number
- Lake or reservoir
- Country border



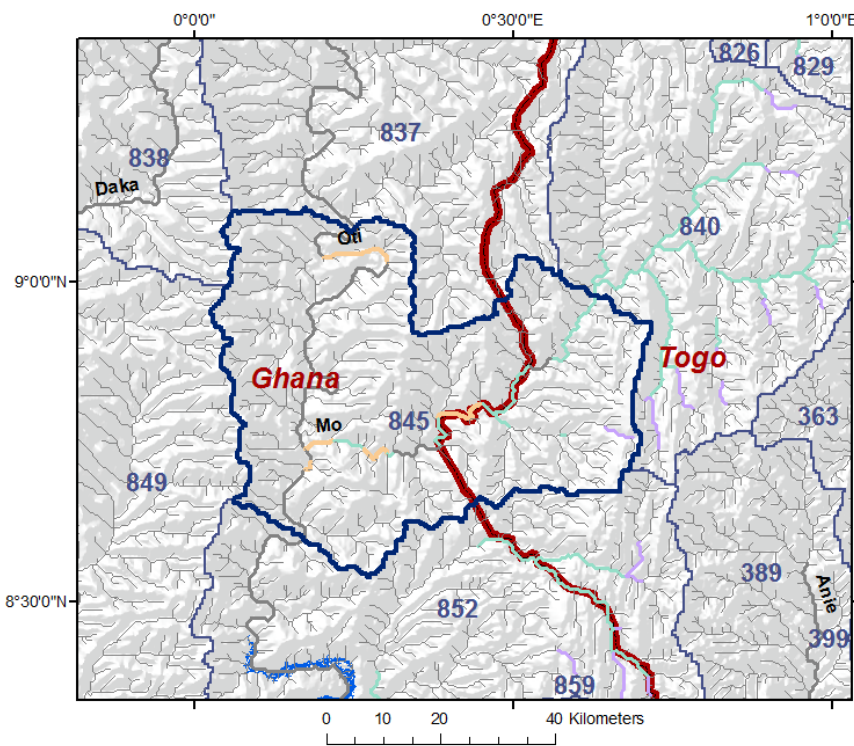

Theoretical Hydropower Potential of Rivers in Sub-Catchment #845	
Pico/micro/mini HPP	0.3 MW
Small HPP	14.4 MW
Medium/large HPP	21.5 MW

This sub-catchment includes the Oti and Mo rivers. Most of the potential for small HPP and medium/large HPP is located at the Mo River, which for some stretch forms the international border with Togo.

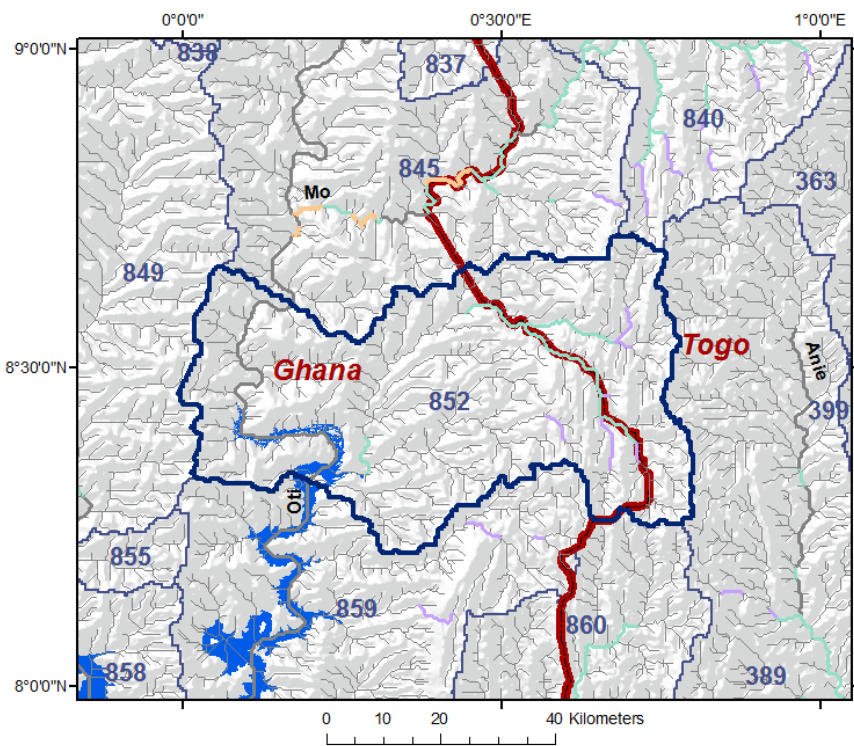

Theoretical Hydropower Potential of Rivers in Sub-Catchment #852	
Pico/micro/mini HPP	2.3 MW
Small HPP	7.9 MW
Medium/large HPP	0 MW

This sub-catchment of the Oti River just upstream of Lake Volta includes tributaries in the east that have some potential for pico/micro/mini HPP and small HPP. Some of the potential is located in neighboring Togo.


**River network showing preferred hydropower plant size**

- Pico/micro/mini HPP
- Small HPP
- Medium/large HPP
- No attractive potential

**Map overlays**


- Existing hydropower plant
- Lake or reservoir
- Sub-catchment boundary
- Country border



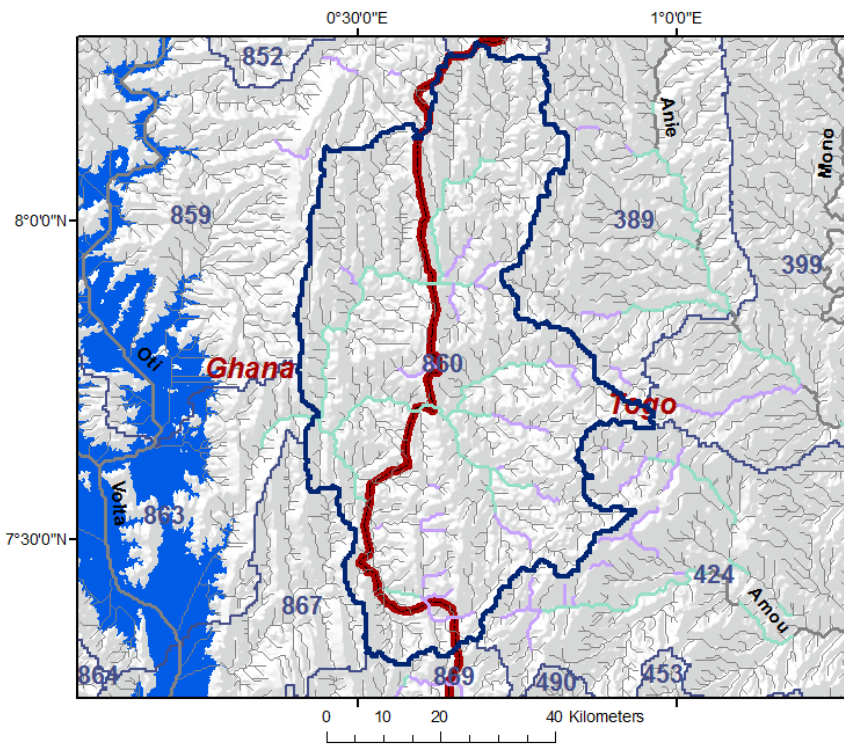

Theoretical Hydropower Potential of Rivers in Sub-Catchment #860	
Pico/micro/mini HPP	8.6 MW
Small HPP	47.8 MW
Medium/large HPP	0 MW

This sub-catchment is located east of Lake Volta and extends into Togo. There is considerable potential for small HPP in Ghana, whereas most of the potential for pico/micro/mini HPP is located in Togo.

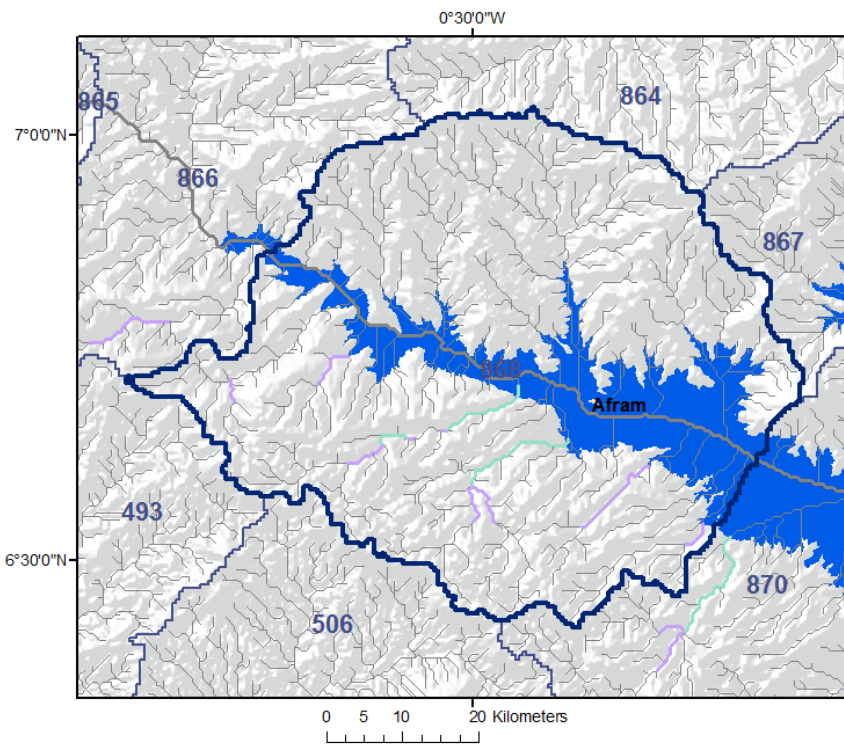

Theoretical Hydropower Potential of Rivers in Sub-Catchment #868	
Pico/micro/mini HPP	3.8 MW
Small HPP	5.2 MW
Medium/large HPP	0 MW

South-west of Lake Volta there are several short but steep streams that have potential for pico/micro/mini HPP as well as small HPP. These streams originally were tributaries to the Afram River, but in this section the Afram River is now submerged by Lake Volta.


**River network showing preferred hydropower plant size**

- Pico/micro/mini HPP
- Small HPP
- Medium/large HPP
- No attractive potential

**Map overlays**

- Existing hydropower plant
- Lake or reservoir
- Sub-catchment boundary
- Country border




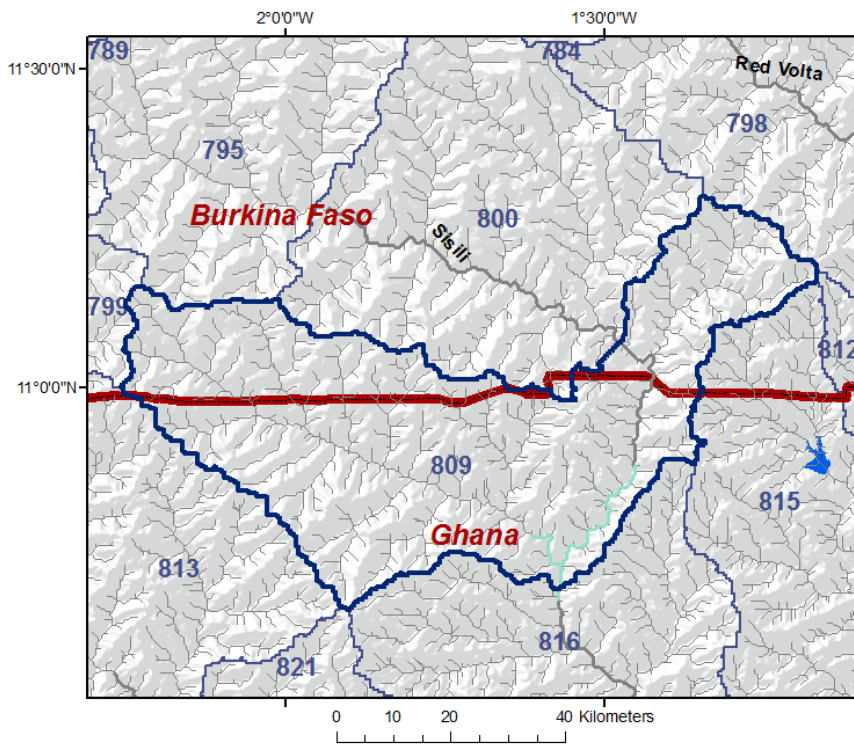

**Theoretical Hydropower Potential of Rivers in Sub-Catchment #809**

Pico/micro/mini HPP	0 MW
Small HPP	8.2 MW
Medium/large HPP	0 MW

In this sub-catchment the Sisili River has some potential for small HPP. The sub-catchment extends into Burkina Faso, but all of the potential is located in Ghana.

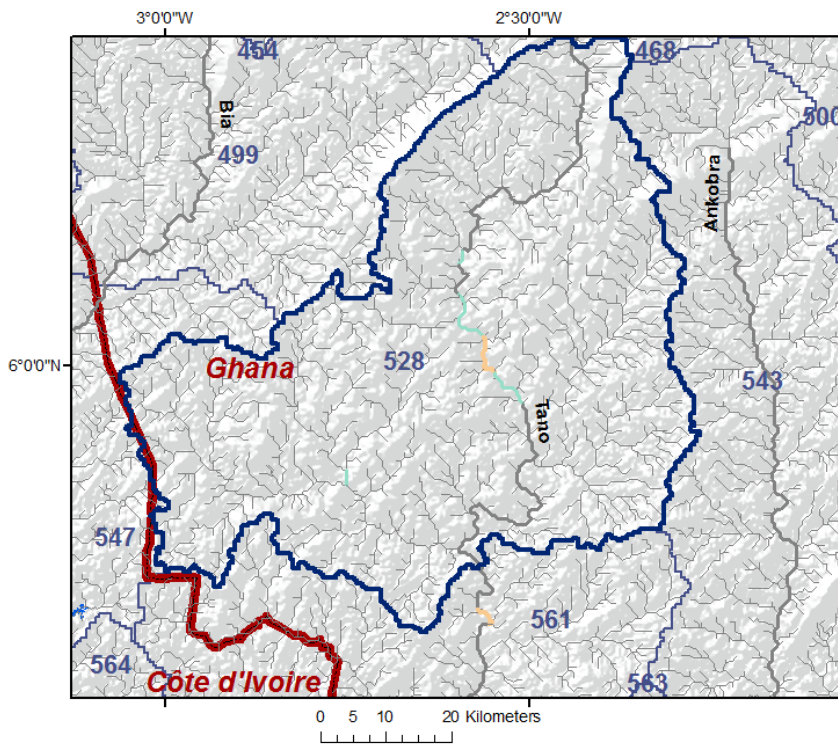

**Theoretical Hydropower Potential of Rivers in Sub-Catchment #528**

Pico/micro/mini HPP	0 MW
Small HPP	8.1 MW
Medium/large HPP	7.0 MW

This is a sub-catchment in the middle section of the Tano River in western Ghana, close to the border with Côte d'Ivoire. Almost all of the potential for small HPP and medium/large HPP is located at the Tano River east of the Boin National Park.

**River network showing preferred hydropower plant size**

- Pico/micro/mini HPP
- Small HPP
- Medium/large HPP
- No attractive potential

**Map overlays**


- Existing hydropower plant
- Lake or reservoir
- Sub-catchment boundary
- Country border



# CLIMATE CHANGE

Climate change may have considerable impact on future water resources and thus hydropower generation. The following figures show an assessment of climate change projections for West Africa based on 15 Regional Climate Models of the CORDEX-Africa ensemble. Two Representative Concentration Pathways (RCP4.5 and RCP8.5) were considered, thus yielding a total of 30 climate model runs. Future runoff was simulated by driving a water balance model with precipitation and temperature climate change signals with respect to the reference period 1998-2014.

## Projections for the Near Future 2026-2045

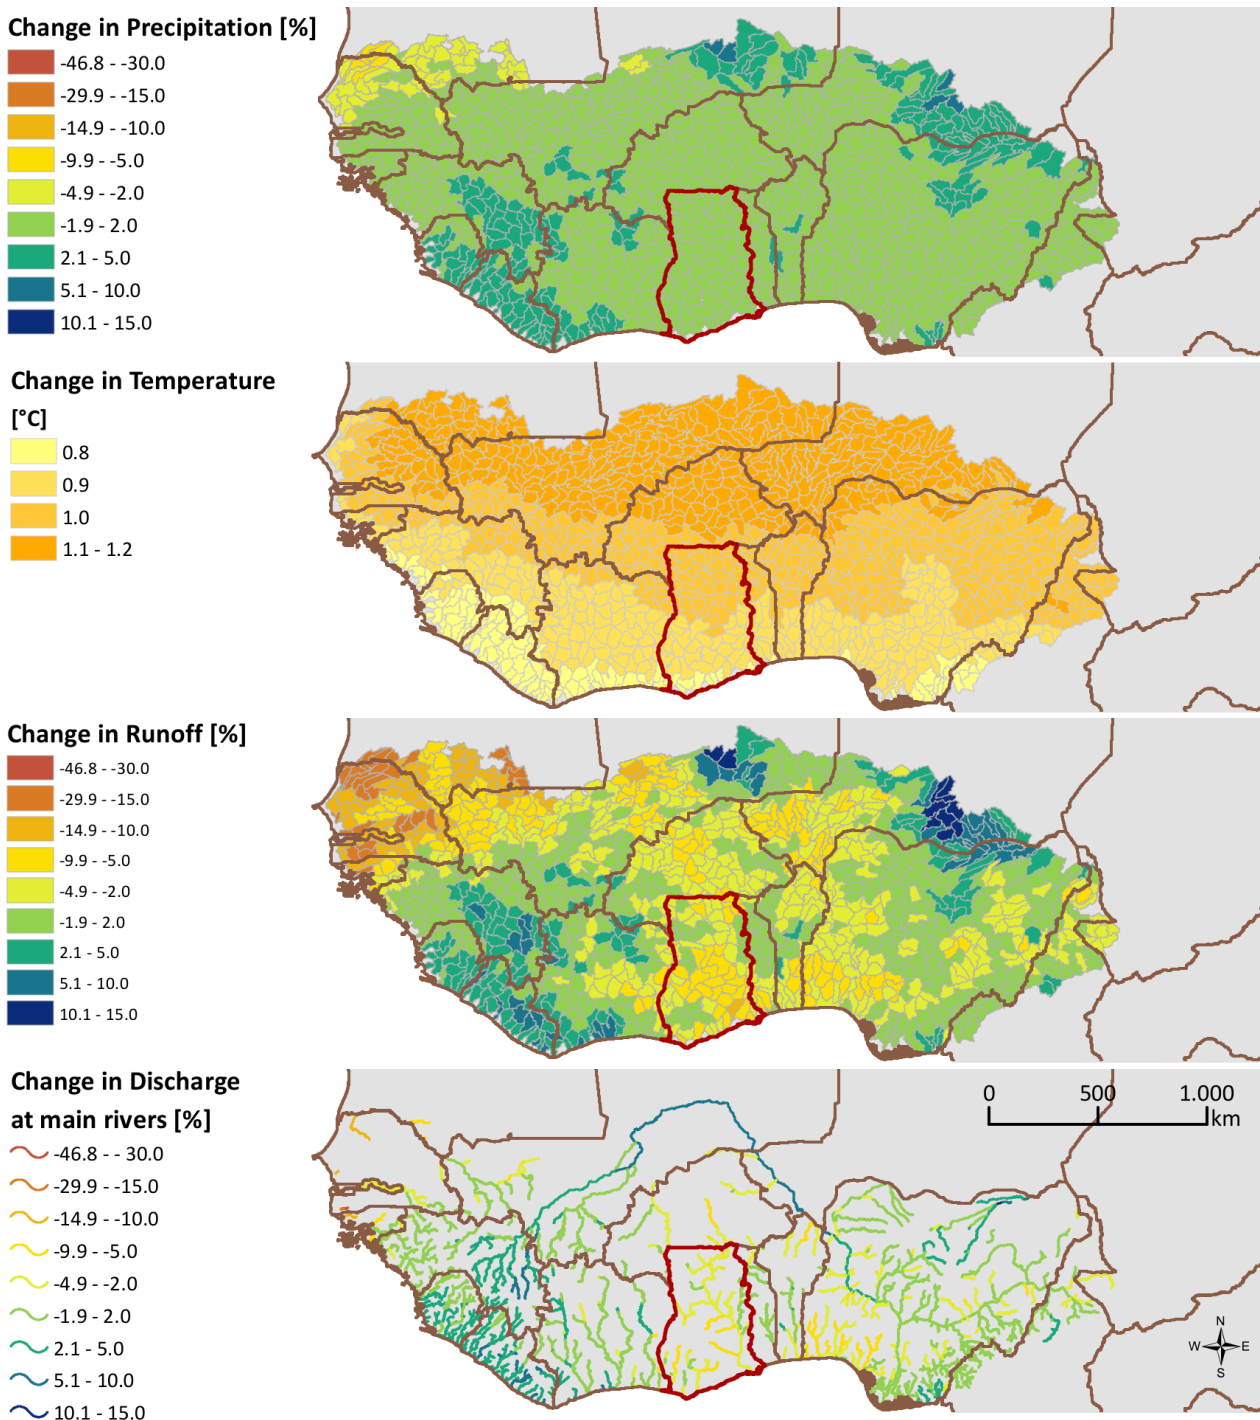




## Projections for the Far Future 2046-2065

The maps below show the expected impact of climate change on future mean annual water resources. From the 30 climate model runs the median result was computed to generate the maps, which show change signals comparing the future periods 2026-2045 (previous page) and 2046-2065 (this page) vs. the reference period 1998-2014.

In large parts of West Africa increase or almost no change is projected for future precipitation. This is also the case for Ghana. The combined effects of future precipitation and considerable warming (which affects evapotranspiration) were simulated with a water balance model to compute future runoff. In no considerable change is projected for future runoff (median of 30 model runs). The same applies to river discharge.

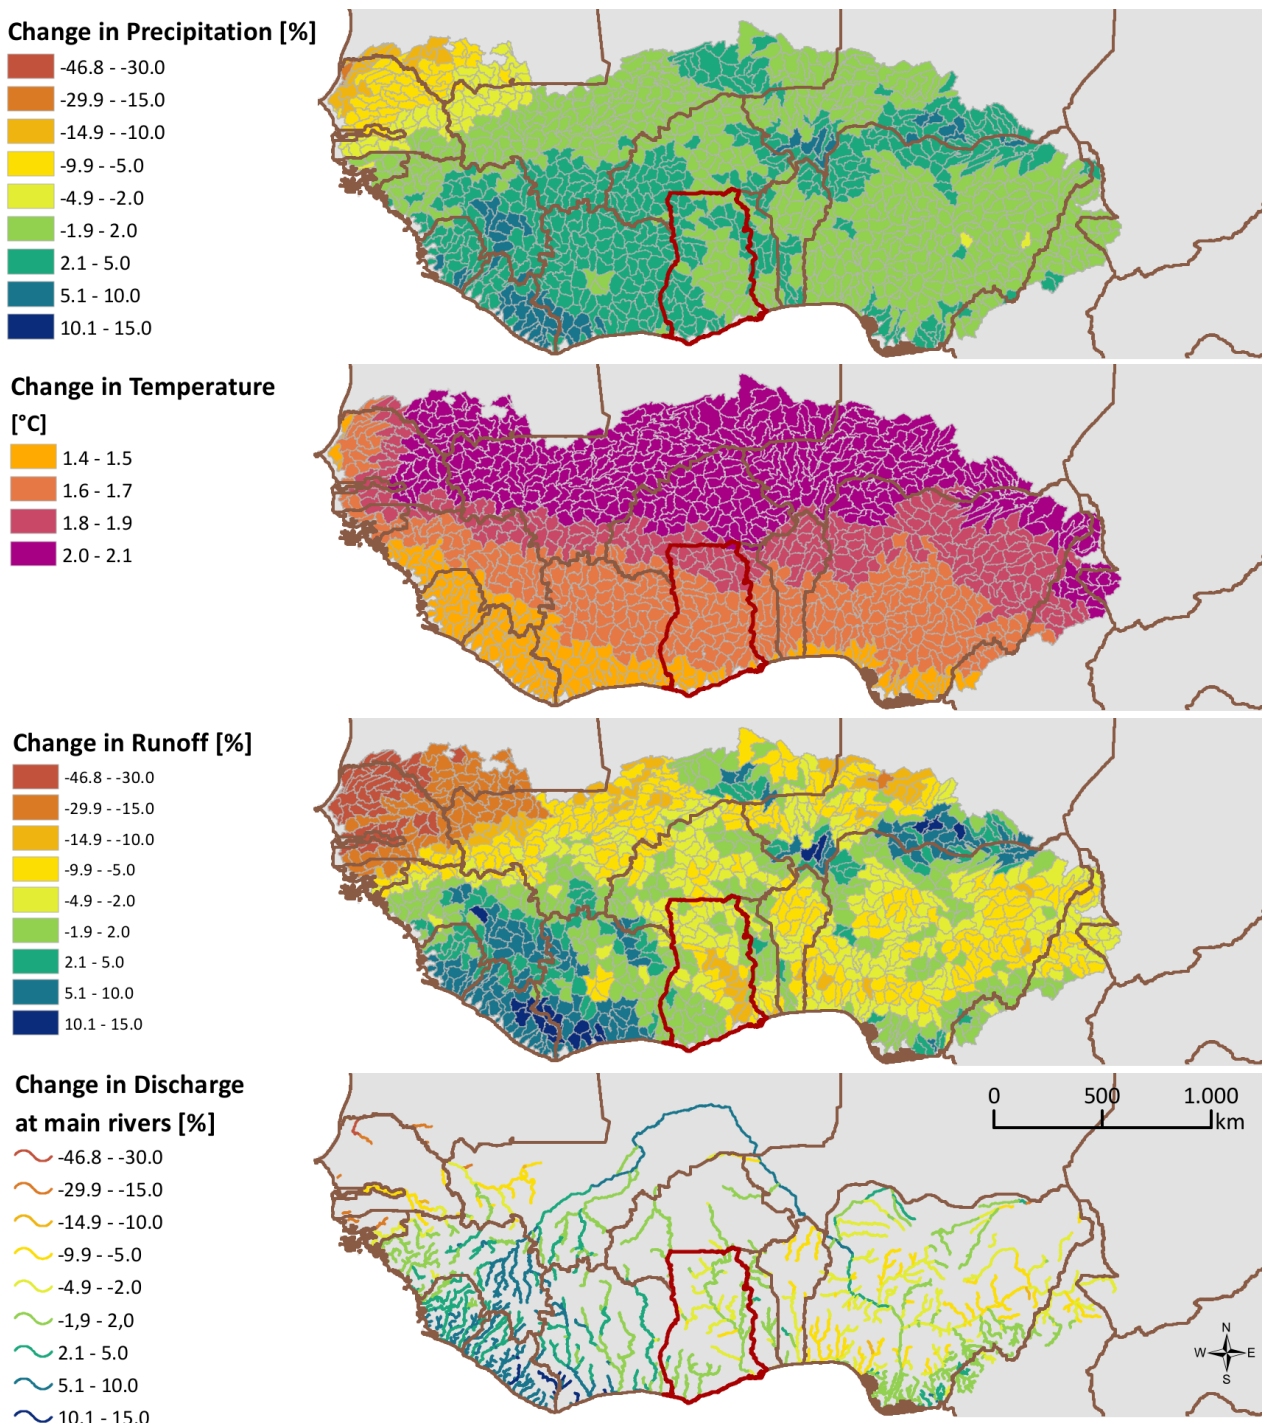

## Projected Change in Discharge for Selected Gauges



Future mean annual discharge was estimated with data from 30 different climate model runs. Boxplots are presented to summarize the spread in the simulation results (see explanation at right).

For rivers in Ghana both increase and decrease is projected by different climate models for the same river, meaning that projections with climate models do not agree on the sign of future change.

For the Black Volta, Pra and Oti rivers the inner quartile range for future change in discharge lies between approximately +/- 10 %. More extreme changes projected by individual climate models can be interpreted as outliers.

Overall the climate change impact assessment shows that given the projections with the most detailed climate models currently available (CORDEX-Africa) there is no clear signal for pronounced changes in future discharge. This means that climate change is not a 'worst-case' scenario for hydropower development in Ghana.

**Boxplot summarizing projections with 30 climate model runs**

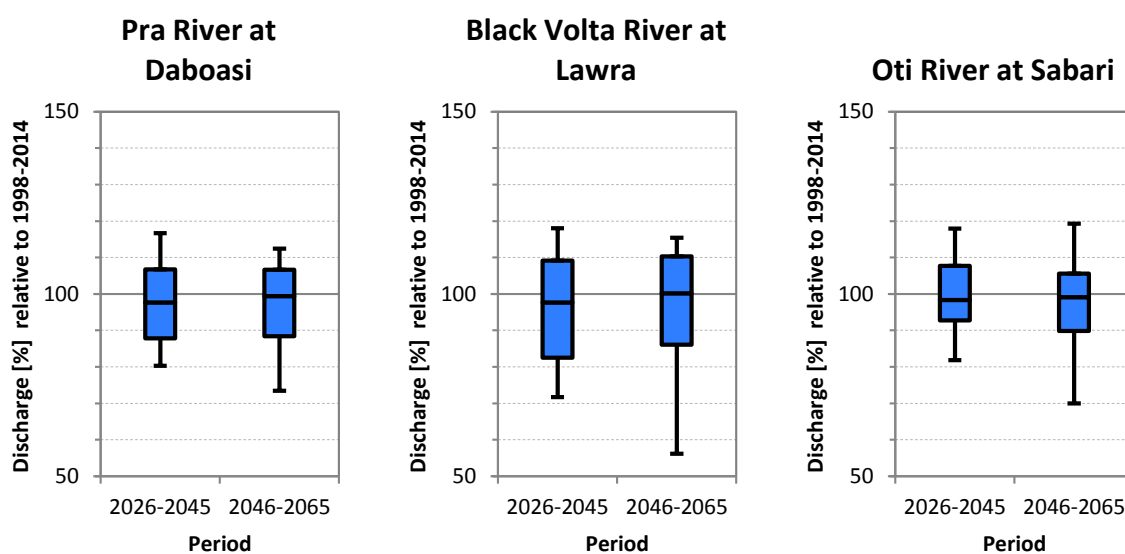

## ACKNOWLEDGEMENTS

This study was conducted by Pöyry Energy GmbH (Vienna, Austria) for the ECOWAS Centre for Renewable Energy and Energy Efficiency (ECREEE, Praia, Cabo Verde). This is a contribution to the ECOWAS Small-Scale Hydro Power Program, which aims to develop the small-scale hydropower sector in West Africa and is funded by the Austrian Development Agency (ADA) and the Spanish Agency for International Development Cooperation (AECID).

Observed discharge data were used for hydrological model calibration and were obtained from the following sources: Global Runoff Data Centre (GRDC), Volta Basin Authority, Niger Basin Authority, Senegal & Gambia Basin Authorities (OMVS, OMVG), Liberia National Hydrological Service, Sierra Leone National Hydrological Service, Japan International Cooperation Agency (JICA).

Precipitation data 1998-2014 are based on Tropical Rainfall Measurement Mission (TRMM 3B42 v7). Additional precipitation data 1950-2010 for model calibration were obtained from the Global Precipitation Climatology Centre (GPCC). Air temperature and potential evapotranspiration data were obtained from the Climatic Research Unit (CRU, Univ. East Anglia), with additional data from the CLIMWAT database of FAO. River network and elevation data were derived from the Hydrosheds dataset (USGS). Climate model data were obtained from the Coordinated Regional Downscaling Experiment for Africa (CORDEX-Africa), which is a project of the World Climate Research Program.

The delineation of climate zones is based on: L'Hôte Y, Dubreuil P, Lericque J. 1996. *Carte des types de climats en Afrique Noire à l'ouest du Congo. Rappels, et extension aux régimes hydrologiques*. In: *L'hydrologie tropicale: géoscience et outil pour le développement* (Actes de la conférence de Paris, mai 1995). IAHS Publ. no. 238, p. 55-65

More information about the general methodology for the GIS hydropower resource mapping is available in: Kling H, Stanzel P, Fuchs M. 2016. *Regional assessment of the hydropower potential of rivers in West Africa*. Energy Procedia, Elsevier, Special Issue of ERE, 8 pp.

